



ZERO CIVIL

TECHNOLOGY THAT TRANSFORMS

IMPACT RESISTANT

Made from impact absorbing advanced polymer compound, that provides a safe, soft surface and self recovers from light impact



FOOTINGS CAN BE MADE REUSABLE

When secured on Impact Recovery System the concrete footings can be protected from damage for the entire lifespan of a development!



UV RESISTANT

Made with unique blend of Supa UV our Advanced Polymer Bollards offer 4.5 times the UV protection required by Australian Standard (AS/NZ 4766:2006)



BOLLARDS CAN BE MADE REUSABLE

When secured on Impact Recovery System bollards self-recover from low-speed impact and are removable and reusable following severe impact

Photo Dept Transport Safety Yellow Advanced Polymer XHD Impact Recovery Bollards

If you need specifications ; need help selecting the correct bollard for your job; or just want to know price and availability of our bollards, you can visit our website **zerocivil.com** or call us on

0414628 511

WE SWEAR TO PROTECT YOU

Unlike "flexible" bollards that simply fold at the slightest sign of danger, we have a strong resistance core that prevents the bollard from deflecting beyond 20 degrees, protecting you and your assets

WE CAN TAKE THE HARD KNOCKS

When severely impacted instead of hours of disturbance, all that rubble and money spent on new bollards and footings, you simply replace the resistance core (less than 5 minutes) and we're back on the job. No fuss!

BUT YOU CAN'T PUSH US AROUND

Unlike spring loaded bollards we can't be deflected by hand, but when impacted by a vehicle we roll with the punches and like the true heroes we are, we slowly, elegantly self-recover, without any fuss!

WE'RE MORE THAN JUST GOOD LOOKS

We're strong but we are kind too. When someone hits us- we don't get all bent out of shape, we are made to take the hard knocks and retain our good looks years after inferior bollards look like @#\$%

Resilient Bollard casing

Unlike old fashioned plastics, our Advanced Polymer provides excellent impact resistance, energy absorption and high tensile strength. UV Stabilised to prevent fading and cracking, and is an efficient electrical insulator, making it great for applications where safety is paramount.

- Highly efficient Electrical Insulator
- High impact resistance
- Abrasion Resistant
- Scratch and marking resistant
- Chemical resistant
- Water and moisture resistant
- UV Resistant/ shatter resistant
- Long-wearing
- Corrosion resistant
- Strength tested to AS/NZS 4766:2006
- UV20 Protection to ASTM D2565
- Australian Made

50 YR LIFE EXPECTANCY (25 IN DIRECT SUNLIGHT)

UV RESISTANT

We use a hexene copolymer based linear medium density polyethylene with a base resin VP319 polymer containing a long-term UV stabilisation package greater than UV8 to ensure bollards won't dry out and will not become brittle – providing 50 year lifespan (25 in direct sunlight)

SPECS

Tensile strength at 72°F: 1,400 psi

Tensile modulus: 57,000

Tensile elongation at break: 100%

Flexural modulus: 29,000 psi

Resilient Foundations

The Impact Recovery System uses 4 mechanisms to reduce maintenance and improve resilience of bollards.



1. HEAVY DUTY RESISTANCE CORE

Unlike spring loaded bollards that over-flex, a Heavy-duty resistance core works to prevent deflection of the bollard beyond 20 degrees when impacted by a passenger vehicle. The resistance core can be increased from Heavy Duty to Extra Heavy Duty

2. HEAVY DUTY RESISTANCE CORE

Unlike spring loaded bollards that over-flex, a Heavy-duty resistance core works to prevent deflection of the bollard beyond 20 degrees when impacted by a passenger vehicle. The resistance core can be increased from Heavy Duty to Extra Heavy Duty

3. SHOCK ABSORBING IMPACT RECOVERY RINGS

Unlike springs that quickly wear out, creating dangerous litigation risks, our re-usable energy absorbing Impact Recovery Rings create a permanent shock absorbing cushion that absorb the impact force and self-recover, with no reduction in capacity following hundreds of impacts, greatly improving energy absorption, safety and resilience

4. ZERO WASTE FOUNDATIONS:

You can secure your bollards using either surface mount or in-ground ZERO WASTE Foundations that continue working, keeping bollards safe and secure, following multiple high and low speed impacts.

4 Options

Use the Impact Comparison and Resilience comparison chart to decide which installation method is most appropriate for your project.

Impact Recovery – Surface Mount









Impact Recovery – In-ground 350









Impact Recovery – In-ground 650


**XHD Impact Recovery – In-ground 650
(Extra Heavy Duty)**



INSTALLATION METHOD	MAX IMPACT	OUTCOME FOLLOWING IMPACT
Impact Recovery – Surface Mount	≈ 13 km/h	Bollard deflects and self-recovers under low-speed impact and side glances. Under higher-speed impact, the resistance core can bend and require replacement. Surrounding footing is not damaged.
Impact Recovery – In-ground 350	≈ 16 km/h	Improved stability over surface mount. Bollard deflects and self-recovers under low-speed impact and side glances. Under higher-speed impact, the resistance core can bend and require replacement. Surrounding footing is not damaged.
Impact Recovery – In-ground 650	≈ 19 km/h	Greater embedment improves resistance to more serious low-speed impacts. Bollard deflects and self-recovers under low-speed impact and side glances. Under higher-speed impact, the resistance core can bend and require replacement. Surrounding footing is not damaged.
XHD Impact Recovery – In-ground 650 (Extra Heavy Duty)	≈ 21 km/h	Highest-duty option for severe low-speed impacts, including impacts from utility vehicles or trucks. Bollard deflects and self-recovers under low-speed impact and side glances. Under higher-speed impact, the resistance core can bend and require replacement. Surrounding footing is not damaged.

BOLLARD		INSTALLATION	BOLLARD REUSABLE	FOOTINGS REUSABLE
		<p>SURFACE MOUNT IMPACT RECOVERY LOW-MEDIUM RESISTANCE Advanced Polymer 150 Ø 1200L. Suitable for low speed zones such as car parks. Existing footing must be solid concrete or asphalt. Rather than “flexing” the bollard has a shock absorbing core that allows the bollard to deflect up to 20 degrees and slowly recover from low speed impacts and glances (no maintenance). Footings and bollard are also reusable following even severe impact.</p>		
		<p>INGROUND 350 MM IMPACT RECOVERY MEDIUM RESISTANCE Advanced Polymer 150 Ø 1200L (350 mm depth) Suitable for low speed zones such as car parks. 350 mm footing suitable for areas with existing concrete footings to provide stability to concrete base and protect against dislodgement.</p> <p>Rather than “flexing” the bollard has a shock absorbing core that allows bollard to deflect up to 20 degrees and slowly recover from low to medium speed impacts and glances (no maintenance). Footings and bollard are reusable following even severe impact.</p>		

BOLLARD		INSTALLATION	BOLLARD REUSABLE	FOOTINGS REUSABLE
		<p>INGROUND 650 MM IMPACT RECOVERY HIGH RESISTANCE Advanced Polymer 150 Ø 1200L (650 mm depth) Suitable for low to medium speed zones such as car parks. 650 mm footing suitable for areas with no existing concrete footings (free standing footing).</p> <p>Rather than “flexing” the bollard has a shock absorbing core that allows bollard to deflect up to 20 degrees and slowly recover from low to medium speed impacts and glances (no maintenance). Footings, and bollard are reusable following more severe impacts and glances (such as utility vehicles)</p>		
		<p>INGROUND 650 MM XHD IMPACT RECOVERY MOST RESISTANT Advanced Polymer 150 Ø 1200L (650 mm depth Extra Heavy Duty Resistance Core provides 150% greater resistance to bending upon impact from a vehicle) Suitable for medium to high impact from large passenger vehicles and utility vehicles.</p> <p>Rather than “flexing” the bollard has a shock absorbing core that allows bollard to deflect up to 20 degrees and slowly recover from low to medium speed impacts and glances (no maintenance). Footings and bollard are reusable following severe impacts (such as utility vehicles).</p>		

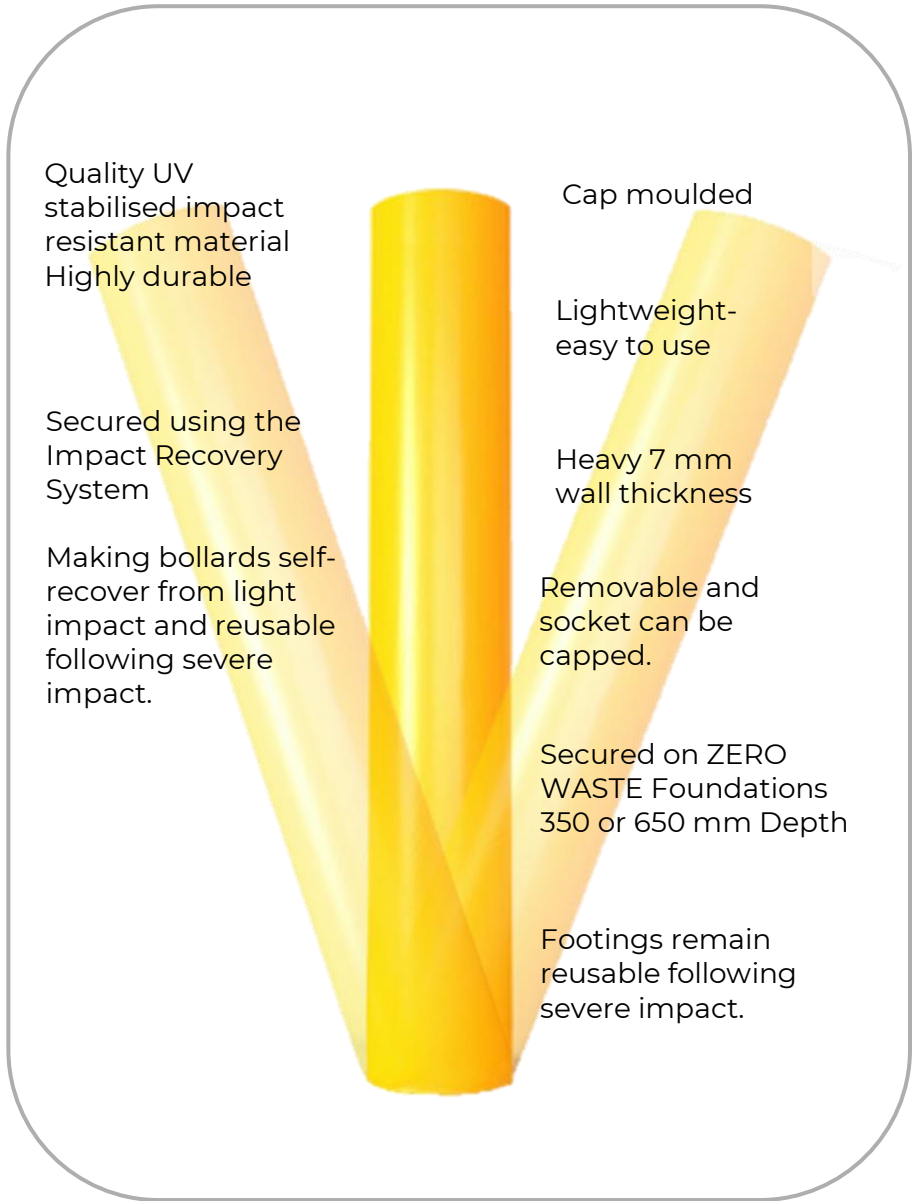

Quality UV stabilised impact resistant material Highly durable

Secured using the Impact Recovery System

Making bollards self-recover from light impact and reusable following severe impact.

Cap moulded

Lightweight-easy to use

Heavy 7 mm wall thickness

Removable and socket can be capped.

Secured on ZERO WASTE Foundations 350 or 650 mm Depth

Footings remain reusable following severe impact.

150 MM ADVANCED POLYMER Impact Recovery Inground



RESILIENCE RATING - 04

1. **Casing:** UV-stabilised, dent and rust resistant
2. **Impact response:** Recovers from low-speed impact
3. **Bollard reuse:** Reusable after severe impact
4. **Footing reuse:** Reusable after severe impact




MORE INFO



Secured using the
Extra Heavy Duty
Impact Recovery
System reducing risk
of core bending by
150%

Secured on ZERO
WASTE Foundations
650 mm Depth



Extra Heavy-duty Resistance Core

150 MM ADVANCED POLYMER XHD Impact Recovery Inground



RESILIENCE RATING – 05

1. **Casing:** UV-stabilised, dent and rust resistant
2. **Impact response:** Recovers from low-speed impact
3. **Bollard reuse:** Reusable after severe impact
4. **Footing reuse:** Reusable after severe impact
5. **XHD Resistance** core provides reduced risk of resistance core bending

MORE INFO





Quality UV stabilised impact resistant material
Highly durable

Cap moulded

Lightweight-
easy to use

Secured using the Impact Recovery System

Heavy 7 mm wall thickness


Making bollards self-recover from light impact and reusable following severe impact.

Secured on Re-usable Heavy Duty 10 mm thick x 300 mm diameter Base Plate with 5 evenly spaced anchors to distribute energy

Footings remain reusable following severe impact.



100% AUSSIE MADE



150 MM ADVANCED POLYMER Impact Recovery Surface Mount



RESILIENCE RATING – 04

1. **Casing:** UV-stabilised, dent and rust resistant
2. **Impact response:** Recovers from low-speed impact
3. **Bollard reuse:** Reusable after severe impact
4. **Footing reuse:** Reusable after severe impact



MORE INFO



innovate to
zero

zero

Impact Recovery Rings are made from advanced urethane and rubber compound, withstanding hundreds of impacts

Ground socket protects surrounding foundations from damage impact after impact

Cap included




350 IRS

650 IRS

Inground Impact Recovery System



Impact Recovery Rings are made from advanced urethane and rubber compound, repeated recovering following impact .



Heavy duty base plate with solid upright spigot resists bending and 6 spaced anchors evenly distribute impact force.



Heavy Duty Resistance core resistant forward movement of vehicles beyond 20 degrees. This is sacrificial (only replaceable component)

Surface mount **Impact Recovery System**




resistance core

With 650 mm Depth Foundations you can choose an Extra Heavy-duty core that increases resistance to bending by 150%

This reduces maintenance in zones subject to impact from utility vehicles and trucks.

NB: You must weigh up the extra damage to vehicles against the benefit of reduced maintenance.

VISIT WEBSITE FOR SPECS & VIDEOS

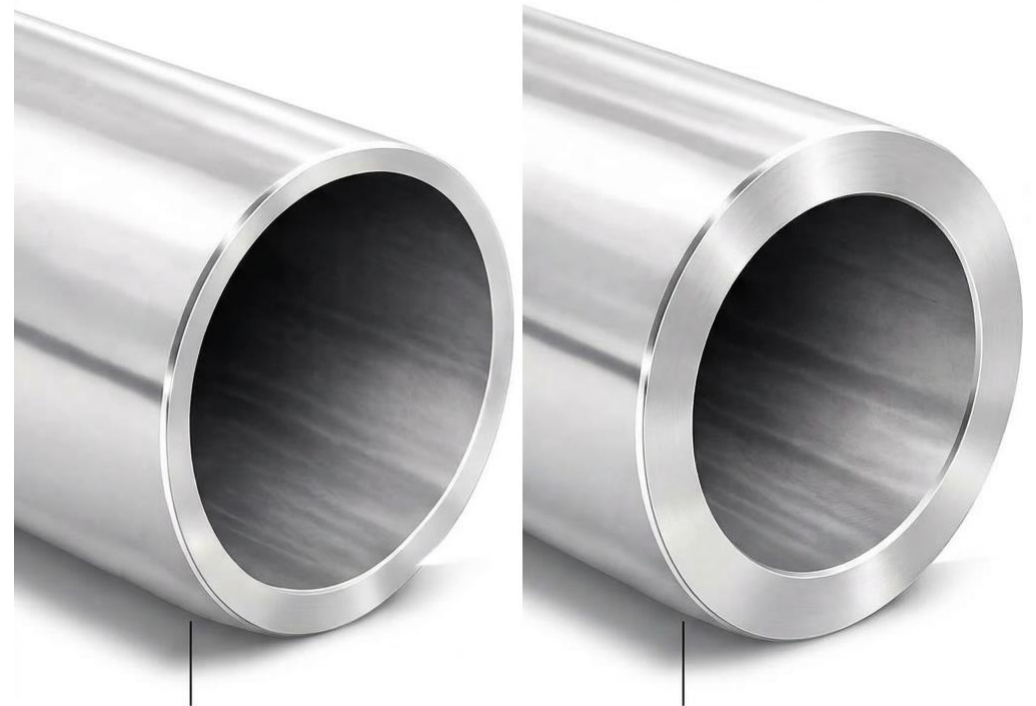

Heavy Duty Resistance Core

Extra Heavy-duty Resistance Core

only replaceable component

Suggest keeping stock, to avoid delays.



S/MOUNT RESISTANCE CORE

Heavy Duty Galvanised Steel. 300 mm Length with securing stud to secure core to base

\$50.00



350 MM DEPTH RESISTANCE CORE

Heavy Duty Galvanised Steel. 350 mm Depth (650 mm Length) with self-locking Taper attached

\$60.00



650 MM DEPTH RESISTANCE CORE

Heavy Duty Galvanised Steel. 650 mm Depth (950 mm Length) with self-locking Taper attached

\$80.00



650 MM DEPTH XHD RESISTANCE CORE

Extra Heavy Duty Galvanised Steel. 650 mm Depth (950 mm Length) with self-locking Taper attached

\$150.00